


LAUNCH PIN/TAB TRANSITIONS TO MICROSTRIP CIRCUITS



FOR FLANGE MOUNT CONNECTORS

APPLICATION:

PIN/TAB:

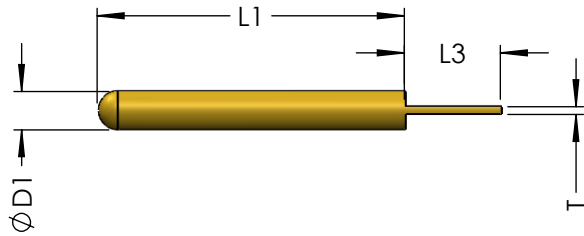

DIELECTRIC:

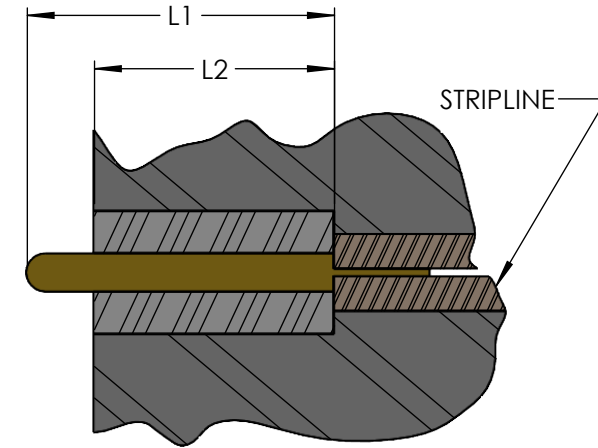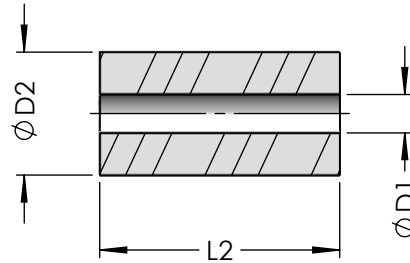

MATERIALS/CONSTRUCTION:

LAUNCH PIN: BeCu, ASTM-B-196

PLATING: GOLD OVER NICKEL, MIL-G-45204

DIELECTRIC: PTFE, ASTM-D-1710

ACCESSORY PART NO.			D ₁	D ₂	D ₃	L ₁	L ₂	L ₃	T
PIN/TAB & DIELECTRIC	PIN/TAB ONLY	DIELECTRIC ONLY							
1200-20-10-M ₃	1200-20-23-M ₃ J	1200-20-24-M ₁	.020	.064	.010	.160	.125	.050	.004
1200-20-10-M ₄	1200-20-23-M ₄ J	1200-20-24-M ₂	.020	.064	.010	.225	.187	.050	.004
1200-15-10-M ₃	1200-15-23-M ₃ J	1200-15-24-M ₁	.015	.048	.007	.160	.125	.030	.004
1200-15-10-M ₄	1200-15-23-M ₄ J	1200-15-24-M ₂	.015	.048	.007	.225	.187	.030	.004
1200-12-10-M ₃	1200-12-23-M ₃ J	1200-12-24-M ₁	.012	.039	.007	.160	.125	.030	.004
1200-12-10-M ₄	1200-12-23-M ₄ J	1200-12-24-M ₂	.012	.039	.007	.225	.187	.030	.004
1200-09-10-M ₃	1200-09-23-M ₃ J	1200-09-24-M ₁	.009	.029	.005	.160	.125	.015	.003
1200-09-10-M ₄	1200-09-23-M ₄ J	1200-09-24-M ₂	.009	.029	.005	.225	.187	.015	.003